


PLAN VERTIKALHEIZKÖRPER

HEIZKÖRPERBEFESTIGUNG

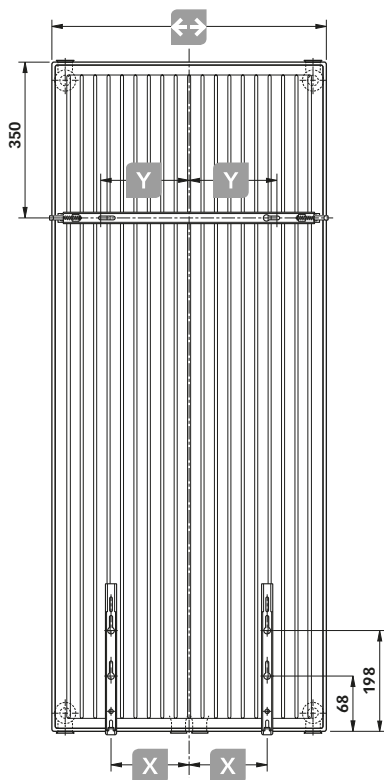

	[MM]			
	300	450	600	750
	75	125	200	250
	60	135	210	285

TYPENÜBERSICHT

Technical drawings of three window frame types (20, 21, 22) showing side and front views with dimensions and icons.

Side View Dimensions:

- Type 20: Total width 109 mm, bottom flange 25 mm, mounting bracket 65 mm.
- Type 21: Total width 109 mm, bottom flange 25 mm, mounting bracket 65 mm.
- Type 22: Total width 134 mm, bottom flange 25 mm, mounting bracket 65 mm.

Front View Dimensions:

- Type 20: Total height 84 mm, side flange 50 mm.
- Type 21: Total height 84 mm, side flange 50 mm.
- Type 22: Total height 109 mm, side flange 50 mm.

Icons:

- Up/Down arrow: Indicates vertical movement.
- Left/Right arrow: Indicates horizontal movement.
- Red Up/Down arrow: Indicates limited vertical movement.



Bauhöhe [mm]		1500		1800			1950			2100		
Baulänge [mm]	Type	21	22	20	21	22	20	21	22	20	21	22
	Gewicht											
300	kg	25,46	27,72	28,30	28,89	31,11	30,60	31,02	33,56	32,85	33,34	35,72
450	kg	36,92	40,27	40,17	42,92	45,81	43,47	45,89	49,07	46,68	49,38	52,31
600	kg	48,37	52,80	52,03	56,94	60,52	56,33	60,77	64,58	60,52	65,41	68,90
750	kg	59,82	65,34	63,90	70,97	75,23	69,20	75,64	80,09	74,35	81,45	85,49

Typenprogramm | PLAN VERTIKALHEIZKÖRPER

Bauhöhe												
	Bauhöhe [mm]	1500		1800			1950			2100		
 Baulänge [mm]	Type	21	22	20	21	22	20	21	22	20	21	22
	Gewicht											
300	I	5,8	5,8	6,50	6,50	6,50	7,10	7,10	7,10	7,60	7,60	7,60
450	I	8,5	8,5	9,70	9,70	9,70	10,70	10,70	10,70	11,40	11,40	11,40
600	I	11,1	11,1	13,00	13,00	13,00	14,30	14,30	14,30	15,20	15,20	15,20
750	I	13,8	13,8	16,20	16,20	16,20	17,90	17,90	17,90	19,10	19,10	19,10

Typenprogramm	PLAN VERTIKALHEIZKÖRPER
---------------	-------------------------

SEITLICHE ABDECKGITTER DES PLAN VERTIKALHEIZKÖRPERS SIND IN DEN LEISTUNGSANGABEN BERÜCKSICHTIGT

LEISTUNGSANGABEN IN WATT NACH DIN EN 442 BZW. ÖNORM EN 442

 Bauhöhe [mm]		1500		1800		1950			2100			
Typ		21	22	20	21	22	20	21	22	20	21	22
HEIZLEISTUNG IN WATT BEI 75/65/20° C (GEPRÜFT NACH DIN EN 442)												
300		850	992	846	886	1046	929	936	1103	975	978	1161
400		1206	1436	1152	1329	1569	1241	1405	1654	1310	1468	1742
600		1563	1880	1459	1772	2092	1554	1873	2205	1644	1957	2323
750		1919	2324	1766	2215	2615	1868	2341	2756	1979	2446	2903
 Baulänge [mm]		HEIZLEISTUNG IN WATT BEI 70/55/20° C (GEPRÜFT NACH DIN EN 442)										
300		686	803	688	715	841	750	755	875	790	788	935
450		973	1160	937	1073	1262	1005	1133	1312	1062	1182	1402
600		1262	1516	1186	1430	1683	1260	1510	1749	1335	1576	1870
750		1551	1871	1436	1788	2104	1516	1888	2186	1608	1969	2337
 Baulänge [mm]		HEIZLEISTUNG IN WATT BEI 55/45/20° C (GEPRÜFT NACH DIN EN 442)										
300		433	510	441	452	528	477	476	533	503	495	587
450		615	734	601	677	792	640	715	799	678	743	881
600		798	956	762	903	1056	804	953	1065	854	991	1175
750		982	1176	922	1129	1320	969	1191	1331	1031	1238	1468
Heiz- körperexp. n	300	1,3218	1,3038	1,2745	1,3192	1,3387	1,3026	1,3231	1,4255	1,2953	1,3327	1,3343
	450	1,3184	1,3140	1,2735	1,3192	1,3387	1,2965	1,3231	1,4255	1,2887	1,3327	1,3343
	600	1,3150	1,3241	1,2726	1,3192	1,3387	1,2903	1,3231	1,4255	1,2822	1,3327	1,3343
	750	1,3116	1,3343	1,2716	1,3192	1,3387	1,2842	1,3231	1,4255	1,2756	1,3327	1,3343
Typenprogramm		PLAN VERTIKALHEIZKÖRPER - komplettes Typenprogramm										