


VERTIKALHEIZKÖRPER



ANSCHLUSS

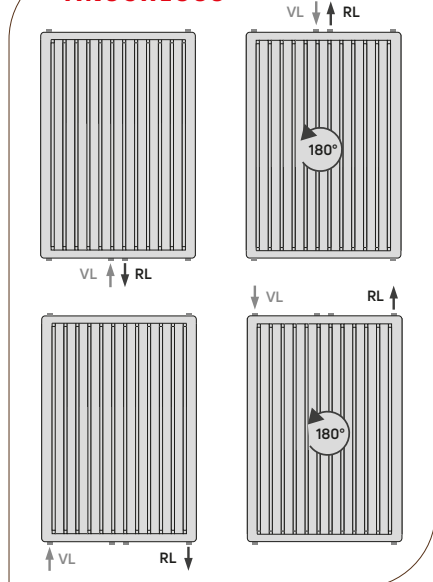

GEWICHTE IN KG FÜR VERTIKALHEIZKÖRPER

	Bauhöhe [mm]	1500				1800				1950				2100				2300
 Baulänge [mm]	Type	10	20	21	22	10	20	21	22	10	20	21	22	10	20	21	22	22
	Gewicht																	
300	kg	-	19,60	20,9	23,0	-	21,40	23,73	25,79	-	23,12	25,62	27,14	-	24,52	27,30	29,68	-
450	kg	14,10	29,40	30,2	33,5	16,86	32,10	35,18	37,84	17,40	34,68	37,79	39,44	18,06	36,78	40,31	43,25	46,61
600	kg	18,80	39,20	39,6	43,9	22,48	42,80	46,42	49,88	23,20	46,24	49,97	51,74	24,08	49,04	53,33	56,82	61,30
750	kg	-	49,00	48,9	54,3	28,10	53,50	58,07	61,93	29,00	57,80	62,14	64,04	30,10	61,30	66,34	70,39	76,00
Typenprogramm		Vertikalheizkörper																

WASSERINHALT IN L FÜR VERTIKALHEIZKÖRPER

	Bauhöhe [mm]	1500				1800				1950				2100				2300
	Type	10	20	21	22	10	20	21	22	10	20	21	22	10	20	21	22	22
Baulänge [mm]	Wasser- inhalt																	
300	I	-	5,80	5,80	5,80	-	6,50	6,50	6,50	-	7,10	7,10	7,10	-	7,60	7,60	7,60	-
450	I	4,80	8,50	8,50	8,50	5,30	9,70	9,70	9,70	5,50	10,70	10,70	10,70	5,70	11,40	11,40	11,40	12,00
600	I	6,10	11,10	11,10	11,10	6,80	13,00	13,00	13,00	7,10	14,30	14,30	14,30	7,40	15,20	15,20	15,20	16,00
750	I	-	13,80	13,80	13,80	8,50	16,20	16,20	16,20	8,80	17,90	17,90	17,90	9,10	19,10	19,10	19,10	20,00
Typenprogramm		Vertikalheizkörper																

SEITLICHE ABDECKGITTER DES VERTIKALHEIZKÖRPERS SIND IN DEN LEISTUNGSANGABEN BERÜCKSICHTIGT

LEISTUNGSANGABEN IN WATT NACH DIN EN 442 BZW. ÖNORM EN 442

 Bauhöhe [mm]		1500				1800				1950				2100				2300
Typ		10	20	21	22	10	20	21	22	10	20	21	22	10	20	21	22	22
		HEIZLEISTUNG IN WATT BEI 75/65/20° C (GEPRÜFT NACH DIN EN 442)																
300		-	704	863	1013	-	819	963	1132	-	877	1020	1192	-	935	1081	1252	-
400		650	1056	1288	1506	765	1229	1445	1698	819	1315	1530	1788	876	1403	1621	1877	1998
600		867	1408	1716	2016	1020	1639	1926	2264	1092	1753	2040	2384	1168	1871	2162	2503	2664
750		-	1760	2148	2549	1275	2048	2408	2830	1365	2192	2550	2980	1460	2339	2702	3129	3329
 Baulänge [mm]		HEIZLEISTUNG IN WATT BEI 70/55/20° C (GEPRÜFT NACH DIN EN 442)																
300		-	570	698	820	-	662	775	908	-	708	820	955	-	755	870	1002	-
450		527	855	1041	1217	617	993	1162	1362	659	1062	1230	1433	703	1132	1305	1503	1600
600		702	1140	1386	1627	822	1324	1549	1816	879	1416	1640	1910	937	1510	1740	2004	2133
750		-	1425	1735	2054	1028	1655	1937	2270	1098	1770	2050	2388	1172	1887	2174	2506	2666
 Baulänge [mm]		HEIZLEISTUNG IN WATT BEI 55/45/20° C (GEPRÜFT NACH DIN EN 442)																
300		-	362	442	521	-	420	486	566	-	448	514	594	-	477	546	623	-
450		335	543	659	771	389	629	729	849	413	672	771	892	439	716	819	934	994
600		447	724	878	1027	518	839	972	1132	551	896	1028	1189	585	954	1092	1245	1325
750		-	905	1097	1293	648	1049	1215	1415	689	1120	1285	1486	732	1193	1365	1556	1656
Heiz- körperexp. n	300	-	1,3012	1,3082	1,3010	-	1,3094	1,3384	1,3566	-	1,3135	1,3422	1,3619	-	1,3176	1,3371	1,3672	-
	450	1,2976	1,3012	1,3106	1,3102	1,3246	1,3094	1,3384	1,3566	1,3381	1,3135	1,3422	1,3619	1,3516	1,3176	1,3371	1,3672	1,3671
	600	1,2976	1,3012	1,3129	1,3195	1,3246	1,3094	1,3384	1,3566	1,3381	1,3135	1,3422	1,3619	1,3516	1,3176	1,3371	1,3672	1,3671
	750	-	1,3012	1,3153	1,3287	1,3246	1,3094	1,3384	1,3566	1,3381	1,3135	1,3422	1,3619	1,3516	1,3176	1,3371	1,3672	1,3671
Typenprogramm		VERTIKALHEIZKÖRPER - komplettes Typenprogramm																